

EVERPURE H-300-NXT DRINKING WATER SYSTEM

Drinking water system: EV927151 Replacement Cartridge: EV927441





The same commercial quality that makes Pentair Everpure[§] the overwhelming choice for water filtration in restaurants is also available for your home. The H-300-NXT is the first of its kind to be certified by NSF to NSF/ANSI Standard 401, to reduce pharmaceuticals that may be found in your water. These contaminants include: some pharmaceuticals, over-the-counter medications, herbicides, pesticides and chemicals used in manufacturing like bisphenol A (BPA). The Pentair Everpure exclusive precoat filtration technology combines Micro-Pure^{*} and a unique pleated filter membrane that is 30% larger than the H-300 filter. Comparable to our top-selling H-300, with added benefits to help give your family peace of mind.

FEATURES • BENEFITS

- Helps prevent lime and scale buildup in water using appliances
- Exclusive Micro-Pure filtration technology protects the pleated surface inside the cartridge
- Dual-stage filtration design ensures maximum reduction of substances
- Retains vital minerals found naturally in water to provide the health benefits and delicious taste of your water

- NSF/ANSI Standard 401 in addition to NSF/ANSI Standard 42 & 53
- The Pentair Everpure signature metal canister delivers commercial-grade durability to protect the system from splitting or bursting
- 30% larger cartridge provides better dirt-holding capacity

GENERAL INSTALLATION / OPERATION / MAINTENANCE REQUIREMENTS

This drinking water system must be maintained according to the manufacturer's instructions, including replacement of filter cartridges. The substances reduced or removed by this system are not necessarily in your water. Read the performance data sheet.

It is recommended that before purchasing a water treatment unit, you have your water tested to determine your actual treatment needs. Space required: 5W x 22H x 5D in (13W x 56H x 13D cm) including 2-1/2 inches of clear space under unit for cartridge change.

Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system. Systems certified for cyst reduction may be used on disinfected water that may contain filterable cysts. A separate drinking water faucet is required


Install vertically with cartridge hanging down

Use minimum length of tubing possible

Flush new cartridge at full flow for five minutes to purge air

Replace cartridge when capacity is reached, or when flow becomes too slow. Cartridges should be replaced annually to ensure the highest quality filtration.

EVERPURE H-300-NXT DRINKING WATER SYSTEM

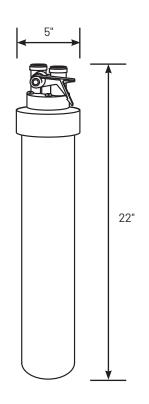

SPECIFICATIONS

- Flow Rate controlled at 0.5 gpm (1.9 Lpm)
- Temperature 35-100° F (2-38° C) cold water use only
- Pressure 10-125 psi (0.7-8.6 bar) non-shock
- Capacity
 300 gal. (1,136 L)
- Required Space
 5W x 22H x 5D in
 13W x 56H x 13D cm



SUBSTANCE REDUCTION

- Lead
- Chlorine taste & odor
- NSF/ANSI Standard 53 certified to reduce cysts such as Cryptosporidium and Giardia by mechanical means
- Enhanced with KDF media to inhibit scale build-up that can damage equipment
- NSF/ANSI Standard 401 certified for the reduction of the incidental contaminants/ emerging compounds listed in the performance data sheet



System Tested and Certified by NSF International against NSF/ANSI Standards 42, 53 and CSA B483.1 for the reduction of the claims specified on the Performance Data Sheet.

EPA EST. NO. 002623-IL-002



13845 Bishops Dr. | Suite 200 | Brookfield, WI 53005 | United States P: 262.238.4400 | Customer Care: 800.279.9404 | tech-support@pentair.com | pentair.com

§For a detailed list of where Pentair trademarks are registered, please visit www.pentair.com/en/registrations.html. Pentair trademarks and logos are owned by Pentair plc or its affiliates. Third party registered and unregistered trademarks and logos are the property of their respective owners.
© 2019 Pentair Residential Filtration, LLC. All rights reserved.

4003561 Rev B JL19